



SM15K - Interface modules

Models	Description
INT MOD M/S-2	Master/Slave interface SM15K
INT MOD CON	Isolated contacts interface
INT MOD SER	Multi-protocol serial interface
INT MOD DIG	Digital I/O interface
INT MOD ANA	Isolated analog interface

General Features

- Plug and Play for the SM15K series power supplies
- Multiple interfaces possible per power supply
- Isolated from the output voltage
Working voltage 1000V or 1500V depending on type of unit
- Floating with respect to earth

Features INT MOD M/S-2

Master Slave interface SM15K

- Easy control of series or parallel operation.
- Multiple power supplies behave as one power supply.
- Large systems, up to 900kW

Features INT MOD CON

Isolated contacts

- 4 relays with make-and-break contacts
- Additional (floating) Interlock with 24V enable system
- Programmable via Ethernet

Features INT MOD SER

Serial controller interface SM15K

- Multi protocol RS232, RS485, RS422, USB
- Web based configuration
- Speeds up to 115.2 kbps

Features INT MOD DIG

Digital (user) I/O

- 8 inputs Logic high = 2.5 ... 30V, Logic low = 0V
- 8 Open Drain outputs 0 - 30V, max. 200mA
- Programmable via Ethernet or sequences

Features INT MOD ANA

Analog controller interface

- High accuracy, low drift
- 16 bit AD and DA conversion
- Compatible with other Delta Elektronika 15p analog interfaces
- Factory calibrated for optimum accuracy

SM15K Interfaces Combinations

Most of the interface types can be combined with others. There are some limitations:

	INT MOD M/S-2	INT MOD CON	INT MOD SER	INT MOD DIG	INT MOD ANA
INT MOD M/S-2					
INT MOD CON					
INT MOD SER					
INT MOD DIG					
INT MOD ANA					



Combination allowed



Multiple interfaces of this type allowed



Combination not allowed

For the total amount per type and the allowed slots, please check the information on the corresponding interface page in this document, under "Assembly".

Master Slave Interface - INT MOD M/S-2

Typical Applications

- Applications where more current or voltage is required than one power supply can deliver
- Applications where a symmetrical power supply is needed



Specifications

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
M/S Parallel operation				
Max. devices	maximum 60 units			
Recovery time	3x the values of a single unit		2x the values of a single unit	
Ripple + noise	Values of a single unit			
Programming Speed	2 x the values of a single unit			
Typical additional programming time	20 μ s			
Programming cable	Modular connector cable S/FTP CAT6 8P8C			
Max. cable length	2m			

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
M/S Series operation				
Max. voltage	Not possible		750V* 1000V**	Not possible
Max. devices			maximum 6 units	
			<i>*) units delivered before Q4 / 2018</i> <i>**) units delivered Q4 / 2018 or newer</i> <i>Contact factory for upgrading to enable 1000V series operation for older units.</i>	
Typical additional programming time	n.a.		20 μ s	n.a.
Programming cable	n.a.		Modular connector cable S/FTP CAT6 8P8C	n.a.
Max. cable length	n.a.		2m	n.a.


Safety	EN 60950 / EN 61010
Operating Temperature	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C

Assembly	Pluggable, SM15K interface slot 3 or slot 4. See paragraph 'Hardware Installation' in the operating manual. Note 1: max 1pcs INT MOD M/S-2 per unit.
Weight	70 g

Isolated Contacts - INT MOD CON

Typical Applications

- Trigger an external safety alarm
- Interact in automated processes
- Switch the output On/Off with a remote 24Vdc signal
- Using a floating signal for triggering the Interlock function

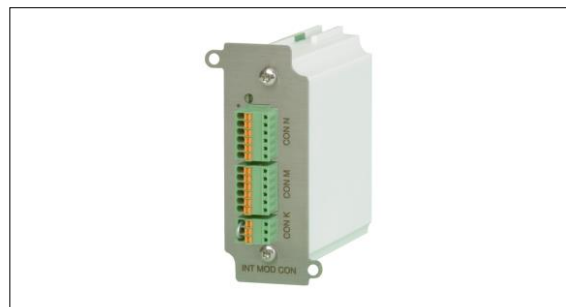

Specifications

Relay contacts 1... 4	
Contact voltage	60 V
Contact current	2 A
Maximum switching capacity	60 W
Floating Interlock	
Open circuit voltage	5 V
Floating Enable	
Nominal input voltage	24 VDC
Input voltage range	15 - 30 VDC
Input impedance	12kOhm

Insulation	
prog.connectors - internal circuits	1000 VDC Reinforced isolation acc. EN60950-1 / EN61010-1 with the exception of 1500 VDC for SM1500-CP-30
prog.connectors - earth	max. 60 VDC
Safety	EN 60950 / EN 61010
Operating Temperature	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C

Mounting	Pluggable, SM15K interface slots 1, 2, 3 and slot 4. See paragraph 'Hardware Installation' in the operating manual. Maximum 4pcs per unit.
Programming connector	Relay 1 & 2, via a 6 pole push wire or so-called push in connector. Relay 3 & 4, via a 6 pole push wire / push in connector. Interlock and Enable via a 3 pole push wire / push in connector. For all 3 connectors there's a contra header supplied.
Weight	0.14 kg

Serial Interface (multi-protocol) - INT MOD SER

Typical Applications

- RS232 Programming
- Balanced RS422 Programming
- USB Programming
- Balanced RS485 Bi-directional Programming



Specifications

Communication speeds (bps)	2400, 4800, 9600, 19200, 38400, 57600, 115200
Insulation prog.connectors - internal circuits	1000 VDC Reinforced isolation acc. EN60950-1 / EN61010-1 with the exception of 1500 VDC for SM1500-CP-30
prog.connectors - earth	max. 60 VDC
Safety	EN 60950 / EN 61010
Operating Temperature	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C
Mounting	Pluggable, SM15K interface slots 1, 2, 3 and slot 4. See paragraph 'Hardware Installation' in the operating manual. Maximum 4pcs per unit.
Programming connector	RS422 & RS485 wires via push wire or so-called push in connector (contra header supplied) RS232 via 9 pole D-connector (female), USB socket type B.
Weight	0.14 kg

Digital User I/O - INT MOD DIG

Typical Applications

- Hardware triggering of sequences
- Interaction with other equipment
- Stand-alone automation
- Safety or Alarm indications



Specifications

Logic inputs 1... 8 Input range Input impedance Load current +5V	2 - 30V $R_{in} = 22k\Omega$ 100mA
Logic outputs 1 ... 8 Output type Output impedance	Open Drain (True = 0V, False = open) 7 Ohm (max 30V/200mA)
Insulation prog.connectors - internal circuits	1000 VDC Reinforced isolation acc. EN60950-1 / EN61010-1 with the exception of 1500 VDC for SM1500-CP-30
prog.connectors - earth	max. 60 VDC
Safety	EN 60950 / EN 61010
Operating Temperature	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C
Mounting	Pluggable, SM15K interface slots 1, 2, 3 and slot 4. See paragraph 'Hardware Installation' in the operating manual. Maximum 4pcs per unit.
Programming connector	User Outputs via 15 pole D-connector High Density (female), User Inputs via 15 pole D-connector High Density (female).
Weight	0.14 kg

Isolated Analog Controller Interface - INT MOD ANA

Typical Applications

- Analog programming of voltage and current
- Analog monitoring of voltage and current
- Remote monitoring of the status signals: OverTemp, Limit
- Remote Shut down of the power output using a 5V signal



Specifications

Analog Programming	CV	CC
Programming inputs		
input range	0 - 5 / 0 - 10 V	0 - 5 / 0 - 10 V *
accuracy	± 0.2%	± 0.2%
offset	- 1 ... + 1 mV (on 5 V)	- 1 ... + 1 mV (on 5 V)
temp. coeff. offset	10 µV / °C	10 µV / °C
input impedance	10 MOhm	10 MOhm
		* CC-prog input (pin3) sets both CC+ and CC- with 1 signal.
Monitoring output		
output range	0 - 5 / 0 - 10 V	- 5 to + 5 V / - 10 to + 10 V
accuracy	± 0.2%	± 0.2%
offset	- 1 ... + 1 mV (on 5 V)	- 1 ... + 1 mV (on 5 V)
temp. coeff. offset	3 µV / °C	60 µV / °C
output impedance	2 Ohm / max. 4 mA	2 Ohm / max. 4 mA

Reference voltage on prog. connector	V_{ref} TC	5.114 ±15 mV ($R_o = 2 \text{ Ohm}$, max. 4 mA) 20 ppm
+12 V output on prog. Connector	V_o I_{max} R_o	12 V ± 0.2 V 0.2 A 5 Ohm
Status outputs		
CC - status	CC - operation	5 V = logic 1 ($R^o = 500 \text{ Ohm}$)
LIM - status	CV or CC limit	5 V = logic 1 ($R^o = 500 \text{ Ohm}$)
OT - status	Over Temperature	5 V = logic 1 ($R^o = 500 \text{ Ohm}$)
ACF - status	AC - Fail	5 V = logic 1 ($R^o = 500 \text{ Ohm}$)
DCF - status	DC - Fail ²⁾	5 V = logic 1 ($R^o = 500 \text{ Ohm}$) ²⁾ $V_{out} \pm 5\%$ beyond set point
PSOL - status	<i>Although present on the interface, for SM15K the PSOL-status is not used, it is only for SM3300.</i>	
Remote Shutdown	with +5 V, 1 mA or relay contact	

Insulation prog.connectors - internal circuits	1000 VDC Reinforced isolation acc. EN60950-1 / EN61010-1 with the exception of 1500 VDC for SM1500-CP-30
prog.connectors - earth	max. 60 VDC
Safety	EN 60950 / EN 61010
Operating Temperature	- 20 to + 50 °C
Humidity	max. 95% RH, non condensing, up to 40 °C max. 75% RH, non condensing, up to 50 °C
Storage temperature	- 40 to + 85 °C

Mounting	Pluggable, SM15K interface slots 1, 2, 3 and slot 4. See paragraph 'Hardware Installation' in the operating manual. Maximum 1pcs INT MOD ANA per unit.
Programming connector	15 pole D-connector (female)
Weight	0.14 kg